


JD1抱箍式精密过滤器

JD1 V-Clamp Cartridge Filter Housing

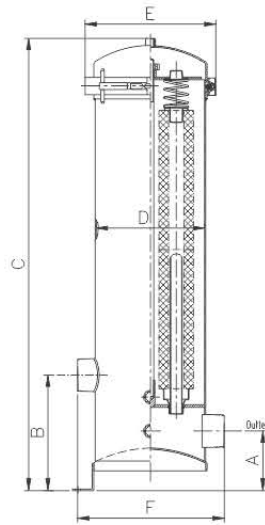

参数概述/General Specifications

- 1、材质SUS304，SUS316L；
- 2、最大工作压力100Psi；
- 3、平底、平压、抱箍式；或带钢碗插件、
- 4、表面抛光处理或。

- 1、Material:SUS304,SUS316L;
- 2、Max working pressure 100Psi;
- 3、V-clamp closure; or with SS cup and spring assembly
- 4、Polished external surface.

尺寸/Dimension

型号/Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Inlet/Outlet	Drain
JD1-Φ170x3X10"	75	180	505	Φ170	Φ216	230	1" ; - 1 1/2"	1/4";1/2"
JD1-Φ170x3X20"	75	180	800	Φ170	Φ216	230	1" ; - 1 1/2"	1/4";1/2"
JD1-Φ170x 3X30"	75	180	1050	Φ170	Φ216	230	1" ; -2"	1/4";1/2"
JD1-Φ200x 5X10"	75	180	560	Φ200	Φ248	260	1" ; -1 1/2"	1/4";1/2"
JD1-Φ200x 5X20"	75	180	810	Φ200	Φ248	260	1" ; -1 1/2"	1/4";1/2"
JD1-Φ200x 5X30"	75	180	1060	Φ200	Φ248	260	1" ; -2"	1/4";1/2"
JD1-Φ200x 5X40"	120	220	1360	Φ200	Φ248	260	1" ; -2"	1/4";1/2"
JD1-Φ250x 7X10"	120	220	620	Φ250	Φ310	310	1 1/2" ; -2"	1/2"
JD1-Φ250x 7X20"	120	220	870	Φ250	Φ310	310	1 1/2" ; -2"	1/2"
JD1-Φ250x 7X30"	120	220	1120	Φ250	Φ310	310	1 1/2" ; -2 1/2"	1/2"
JD1-Φ250x 7X40"	120	220	1370	Φ250	Φ310	310	1 1/2" ; -2 1/2"	1/2"